

ITEM NO. _____
 PROJECT _____
 LOCATION _____
 DATE _____ QTY. _____



MCCWD SERIES

Cold Wall Evaporator

Dual Access Milk Coolers

MODELS

- MCCWD-084
- MCCWD-124
- MCCWD-164

FEATURES

CONSTRUCTION

- White enamel painted steel exterior
- Galvanized steel interior including door interior
- Four 4" easy-roll swivel casters (two locking)
- Epoxy-coated heavy-duty floor racks (stainless steel option available)
- Reinforced base to maintain cooler integrity when fully loaded
- 2 1/2" fiberglass insulation
- NSF-listed floor drain
- NSF-listed thermometer

DOOR

- Self service doors with stainless steel exterior
- Fold-back door is locking and insulated
- Door equipped with gaskets and chrome plated hinges
- Designed to be easily opened by children for self-service

REFRIGERATION

- Self-contained, bottom mount
- Powerful, large-capacity system allows cooler to maintain proper temperature for longer amount of time with doors open

- Cold wall evaporator with no moving parts which allows more storage space
- Refrigerant: R-22
- Operating temperature: 38°F (3°C)

WARRANTY


- Standard limited four year extended compressor and one year limited parts and labor

CAPACITY

MODEL	CASES WITH CARTONS				LOOSE CARTON (WITHOUT CASES)	
	13" x 13" x 11"H		19" x 13" x 11"H		1/2 PINT	1 PINT
	CASES	CARTONS	CASES	CARTONS		
MCCWD-082	8	352	4	288	864	432
MCCWD-122	12	528	8	576	1368	684
MCCWD-162	16	704	12	864	1800	900

OPTIONS

- Add "SS" for stainless steel interior and exterior
- Laminate for top, front, sides and back
- (4) six-inch adjustable legs
- Strip curtain
- Stainless steel floor rack
- Corner bumpers




Kool Star®

MCCWD SERIES COLD WALL EVAPORATOR DUAL ACCESS MILK COOLERS


TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF FLOOR RACKS	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. LB/KG
	L	D	H*	L	D	H*							
MCCWD-084	35	35	44	889	889	1118	115	4.1	1/4	2	12.2	36.7	326/148
MCCWD-124	49	35	44	1245	889	1118	115	4.8	1/4	3	17.8	49.9	352/160
MCCWD-164	63	35	44	1600	889	1118	115	5.7	1/4	4	23.5	64.0	484/220


*Height includes casters.

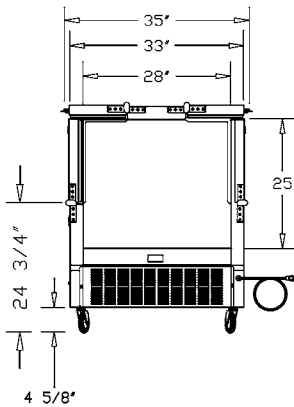


SIDE VIEW

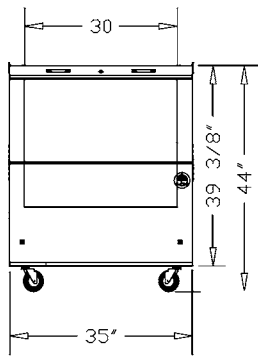

MCCWD-084
ELEVATION VIEW

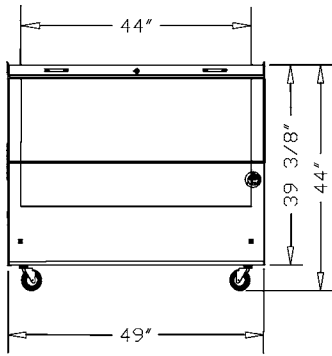

MCCWD-124
ELEVATION VIEW

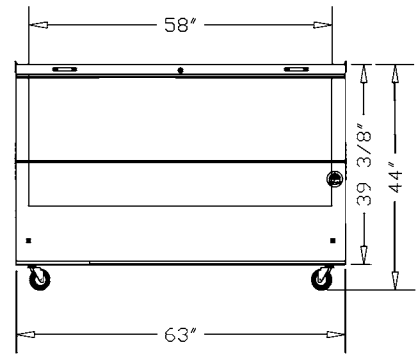

MCCWD-164
ELEVATION VIEW

LISTINGS



HOOKUP

Via plug in, 7 foot long flexible three wire 16 gauge cord with molded plug.



BID SPECIFICATIONS

Item no. MCCWD- _____
 Provide _____ () Cold Wall Evaporator Dual Access Milk Cooler(s), Kool Star model no. MCCWD- _____

Milk cooler will be a dual access type and will be constructed of white painted steel on the exterior with galvanized steel interior. Doors to be stainless steel on the exterior with galvanized steel interior. Doors will also be locking and fold-back type. In addition, door will be equipped with gaskets, stainless steel hinges and a

hold-open feature to secure during serving.

Cooler to be provided with four swivel casters (two locking) and an NSF-listed floor drain and thermometer. Additionally, cooler will contain heavy-duty epoxy-coated floor racks and a reinforced base to maintain cooler integrity when fully loaded. Cabinet insulation will consist of 2 1/2" thick fiberglass. Door and cabinet top foamed-in-place with polyurethane insulation.

The refrigeration system will be self-contained, bottom mounted with a cold wall evaporator. System will contain R-134A refrigerant. The operating temperature will be 38°F (3°C).

Cooler to have standard limited four year extended compressor warranty and one year limited parts and labor warranty.

Cooler to be UL and C-UL listed as well as UL EPH classified.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.