



ITEM NO. _____
PROJECT _____
LOCATION _____
DATE _____ QTY. _____



KSGR48S



KSGR SERIES Bottom Mounted Sliding Glass Door Reach-In Refrigerator

MODEL

KSGR48S

This equipment is intended for storage and display of non-potentially hazardous bottled or canned products only.

FEATURES

CONSTRUCTION

- White powder coated steel on exterior and interior
- Foamed-in-place with low ODP polyurethane insulation
- Top graphic panel backlit by fluorescent lights (graphics not supplied)
- Interior vertical fluorescent lighting
- Wall thickness: 1.6"
- Adjustable legs for leveling
- Four adjustable heavy-duty vinyl-coated shelves per door

DOORS

- Hold open feature
- Self-closing
- Double pane glass with layer of patented transparent thermal insulation film between glass panes provides superior insulation without the weight of triple pane glass

REFRIGERATION

- Self-contained bottom mount refrigeration system
- Capillary tube to control refrigerant flow

- Fabric condensation kit uses wicks to draw condensate from the drain pan for faster removal
- Refrigerant: R-134a
- Temperature range: 32° to 40°F (0° to 4° C)

WARRANTY

- Standard limited four year extended compressor and one year limited parts and labor




KSGR SERIES BOTTOM MOUNTED SLIDING GLASS DOOR REACH-IN REFRIGERATOR


TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	STANDARD SHELF SIZE (in inches)	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D*	H	L	D*	H									
KSGR48S	53 1/4	30 3/4	78 3/4	1353	781	2363	115	10.0	1/2	2	8	24.2 x 23.5	48.0	83.8	476/216

*Depth includes door handle.

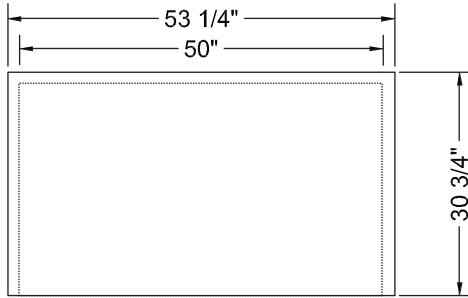

PLAN VIEW

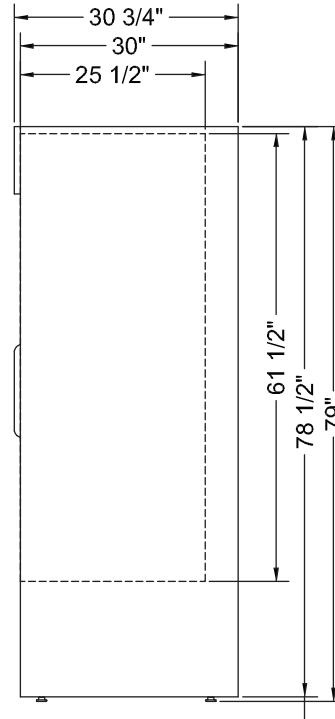

SIDE VIEW


LISTINGS



This equipment is intended for storage and display of non-potentially hazardous bottled or canned products only.

HOOKUP

All models via plug in, 9.8 foot long flexible three wire 14/3 cord with molded plug.



NEMA 5-15P

BID SPECIFICATIONS

Item no. KSGR48S. Provide _____ Bottom Mounted Glass Door Reach-in(s), Kool Star model no. KSGR48S.

Reach-in will be constructed of white painted steel on interior and exterior. Standard features will include vinyl-coated

welded wire shelves and doors with double pane glass.

The refrigeration system will be bottom mounted and self-contained. Refrigerant will be R-134A. The temperature range will be 32° to 40°F (0° to 4° C).

Reach-in to have standard limited 4 year extended compressor warranty and one year limited parts and labor warranty. Reach-in to be UL, C-UL and ETL Sanitation listed.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.